

# Termination resistor - SAC-5P-M12MS CAN TR - 1507816


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Terminating resistor CANopen®/DeviceNet™ M12



## Key Commercial Data

Packing unit	5 pc
GTIN	 4 017918 900410
GTIN	4017918900410

## Technical data

### Dimensions

Width	14.8 mm
Height	14.8 mm
Length	56.3 mm

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 90 °C (Plug)
	-25 °C ... 90 °C (Plug)
Degree of protection	IP65
	IP67

### General

Rated current at 40°C	4 A
	45 mA ( $I_{eff}$ )
Rated voltage	48 V AC
	60 V DC
	5 V <sub>rms</sub>
Termination resistor	120 Ω ±1 %
Power consumption	≤ 0.25 W

# Termination resistor - SAC-5P-M12MS CAN TR - 1507816

## Technical data

### General

Number of positions	5
Coding	A - standard
Status display	No
Overvoltage category	II
Degree of pollution	3
Insertion/withdrawal cycles	≥ 100

### Material

Flammability rating according to UL 94	HB
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR

### Standards and Regulations


Flammability rating according to UL 94	HB
--	----

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


## Drawings

Schematic diagram



Pin assignment M12 male connector, 5-pos., A-coded, male side


Dimensional drawing

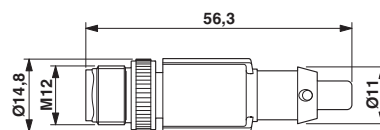


Plug, M12 x 1, straight, shielded

# Termination resistor - SAC-5P-M12MS CAN TR - 1507816

Circuit diagram



Circuit diagram



Contact assignment of the termination resistor; for resistance values, see Internal wiring of connections technical data

## Classifications

### eCl@ss

eCl@ss 10.0.1	19070403
eCl@ss 11.0	19070403
eCl@ss 4.0	27140800
eCl@ss 4.1	27140800
eCl@ss 5.0	19070400
eCl@ss 5.1	19070400
eCl@ss 6.0	19070400
eCl@ss 7.0	19070403
eCl@ss 9.0	19070403

### ETIM

ETIM 2.0	EC001121
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 6.0	EC000448
ETIM 7.0	EC000448

### UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	32121617
UNSPSC 18.0	32121617
UNSPSC 19.0	32121617
UNSPSC 20.0	32121617
UNSPSC 21.0	32121617

## Approvals

Approvals

# Termination resistor - SAC-5P-M12MS CAN TR - 1507816

## Approvals

---

Approvals




EAC / EAC / EAC

---

Ex Approvals

---

## Approval details

EAC		RU C- DE.AI30.B.01102
EAC		EAC-Zulassung
EAC		RU C- DE.BL08.B.00511

---

Phoenix Contact 2021 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>